

BS-2080 Laboratory Biological Microscope



Introduction

BS-2080 Laboratory Biological Microscope is a high level microscope which is specially designed for laboratory research. It adopts an Infinite optical system, reasonable structure and ergonomic design. With an innovative optical and structure design idea, excellent optical performance and easy to operate system, this laboratory biological microscope makes your laboratory works enjoyable.

Feature

- 1. With Infinite Optical System, Kohler Illumination, providing excellent optical quality and making Image perfect.
- 2. With low and forward position of coarse and fine coaxial focus system, focusing knobs and brightness adjustable knob within reaching location, stable integral structure, and reasonable ergonomic design, making operators feel more comfortable and effective.

Application

This microscope is an ideal instrument in biological, histological, pathological, bacteriology, immunizations and pharmacy field and can be widely used in medical and sanitary establishments, laboratories, institutes, academic laboratories, colleges and universities.



Viewing Head



Comfortably Observing with Seidentopf Type Trinocular Head Inclined at 30°. Suitable for Every Observer with Wide Interpupillary Range 48-75mm.

Eyepiece



Larger Viewing Area with Extra Wide Field Eyepiece EW10×/22. Focus Control with Diopter Adjustable.

Nosepiece



Big Operating Space with Backward Quintuple Nosepiece.

Objective



Perfect Image with Infinite Plan Achromatic Objective.

Stage



Rectangle Double Layers Mechanical Stage 185×142mm, Moving Range 75×55mm. Comfortable Operation with Low Position Adjustable Knobs.

Condenser





With Swing Condenser N.A.0.9/0.25, Overcoming Illumination Asymmetry at Low Magnification Observation.

Field Diaphragm



With Aspherical Condenser and Kohler Illumination, Providing Enough, Even and High Contrast Illumination for Various Objective Observation.

Illuminator



Specification

Item	Specification		
Optical System	Infinite Optical System		
Viewing Head	Siedentopf Trinocular Head, Inclined at 30°, 360° Rotatable, Interpupillary 48-75mm		
	5°-35° Tiltable Binocular/ Trinocular Head	0	
Eyepiece	Extra Wide Field Eyepiece EW10×/ 22mm, Eyepiece Tube Diameter 30mm		
Nosepiece	Backward Quintuple Nosepiece		




Beijing BestScope Technology Co., Ltd.

		201,1118 200000 1001111011087			
	Backward Sextuple Nosepi	ece	0		
Objective		2×/0.05, W.D.=18.3mm	0		
	Infinite Plan Achromatic Objective	4×/0.10, W.D.=17.3mm	•		
		10×/0.25, W.D.=10mm	•		
		20×/0.40, W.D.=5.1mm	0		
		40×/0.65(S), W.D.=0.54mm	•		
		60×/0.8(S), W.D.=0.14mm	0		
		100×/1.25(S, Oil), W.D.=0.13mm	•		
	Infinite Plan Fluorescent Objective	4×/0.13, W.D.=16.3mm	0		
		10×/0.30, W.D.=12.4mm	0		
		20×/0.50, W.D.=1.5mm	0		
		40×/0.75(S), W.D.=0.35mm	0		
		100×/1.3(S, Oil), W.D.=0.13mm	0		
Condenser	Swing-out Condenser NA 0	0.9/ 0.25	•		
Farmina	Coaxial Coarse and Fine Ad	ljustment, Fine Division 0.001mm, Coarse Stroke 37.7mm per			
Focusing Stage	Rotation, Fine Stroke 0.1mm per Rotation, Moving Range 24mm				
Stage	Double Layers Mechanical	Stage 185×142mm, Moving Range 75×55mm	•		
	External Illumination, Aspherical Collector with Kohler Illumination, Halogen Lamp 6V/30W,				
	Brightness Adjustable				
Illumination	External Illumination, Aspherical Collector with Kohler Illumination, Halogen Lamp 24V/100W,				
Illumination	Brightness Adjustable				
	3W LED Illumination, Brightness Adjustable				
	5W LED Illumination, Brightness Adjustable				
Video Adapter	C-Mount 1×				
	C-Mount 0.5×				
Filter	Blue Filter	2x/0.05, W.D.=18.3mm 4x/0.10, W.D.=17.3mm 10x/0.25, W.D.=10mm 20x/0.40, W.D.=5.1mm 40x/0.65(S), W.D.=0.54mm 60x/0.8(S), W.D.=0.14mm 100x/1.25(S, Oil), W.D.=0.13mm 4x/0.13, W.D.=16.3mm 10x/0.30, W.D.=12.4mm 20x/0.50, W.D.=1.5mm 40x/0.75(S), W.D.=0.35mm 100x/1.3(S, Oil), W.D.=0.13mm 0.9/0.25 Idjustment, Fine Division 0.001mm, Coarse Stroke 37.7mm per mm per Rotation, Moving Range 75x55mm Sherical Collector with Kohler Illumination, Halogen Lamp 6V/30W, Otherical Collector with Kohler Illumination, Halogen Lamp 24V/100W, Oth	•		
riitei	Green Filter		•		
Dark Field	Dark-field Condenser(Dry)		0		
Attachment	Dark-field Condenser(Oil)		0		
Accessories	Photo Attachment for Nikon or Canon DSLR cameras		0		
	Polarization Attachment				
	Turret Phase Contrast Kit				
	FL-800 Epi-fluorescent Attachment				
	FL-LED Epi-fluorescent Attachment				
	Temperature Control Stage				
Package	1carton/set, 43.5cm*39.5c	cm*59cm, 14kg	•		

Note: ● Standard Outfit, ○ Optional



Sample Image

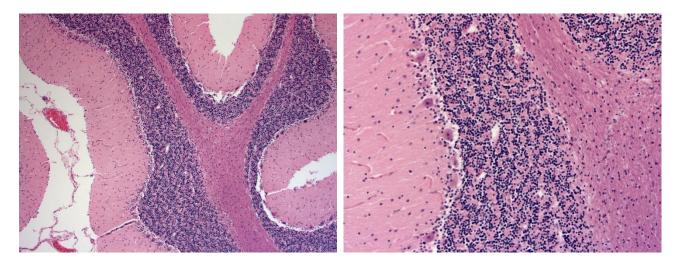



System Diagram



 $^{^\}star$ $\,$ Viewing field of auxiliary objective is $\Phi 20$ when with the accessories