

BUC1D Series C-mount USB2.0 CMOS Camera



Introduction

BUC1D series cameras adopt ultra-high performance CMOS sensor as the image-capture device. USB2.0 is used as the data transfer interface.

BUC1D series cameras' hardware resolutions ranges from 2.1MP to 12MP and come with the zinc aluminum alloy compact housing. BUC1D come with advanced video & image processing application ImageView; Providing Windows/Linux/OSX multiple platform SDK; Native C/C++, C#/VB.NET, DirectShow, Twain Control API; The BUC1D can be widely used in bright field light environment and microscope image capture and analysis with moderate frame rate.

Feature

1. Standard C-Mount camera with Sony or OnSemi CMOS sensor;
 2. With hardware resolution among 2.10MP to 12MP;
 3. USB2.0 interface ensuring high speed data transmission;
 4. Integrated with large capacity memory chip ensures data synchronous transmission, low latency, high frame rate and stability;
 5. Compatible with Microsoft USB Video Class protocol and support the third-party software development;
 6. Built in Ultra-fine hardware ISP engine ensures high color restoration;
- (1) Support automatic/manual exposure switching, accurate exposure time control, and real-time adjustment of exposure target area;

- (2) Support automatic/manual/ROI white balance;
- (3) Support color adjustment/color mode selection/image flipping;
- (4) Support histogram adjust/flat field correction/dark field correction/video ROI;
- 7. High performance MJPEG compression algorithm, combined with the unique decoding method of image restoration algorithm ensure highest frame rate of USB2.0 camera in the industry. The FPS for 5MP and 8MP can be up to 30FPS; the FPS for 12MP can be up to 15FPS;
- 8. Comply with CE and FCC agreements;
- 9. CNC aluminum alloy housing;
- 10. With advanced video & image processing application ImageView;
- 11. Providing Windows/Linux/Mac OS multiple platforms SDK;
- 12. Very competitive pricing.

Specification

Order Code	Sensor & Size(mm)	Pixel(μm)	G Responsivity Dynamic range SNRmax	FPS/Resolution	Binning	Exposure
BUC1D-1200C	12M/IMX577(C) 1/2.3" (5.95x4.71)	1.55x1.55	250LSB 70dB 43dB	20@3840x3040 20@1920x1520 20@960x760	1x1 1x1 1x1	0.1-2000 ms
BUC1D-830C	8.3M/IMX274(C) 1/2.5" (6.22x3.50)	1.62x1.62	236mV 70dB 43dB	30@3840x2160 30@1920x1080 30@1280x720 30@960x540	1x1 1x1 1x1	0.1-2000 ms
BUC1D-510AC	5.1M/AR0521(C) 1/2.5" (5.70x4.28)	2.2x2.2	18.8ke-/lus 73dB 40dB	30@2592x1944 30@1280x960 30@640x480	1x1 1x1 1x1	0.1-1000 ms
BUC1D-510BC	5.1M/IMX335(C) 1/2.8" (5.18x3.89)	2.0x2.0	505mV 70dB 43dB	26@2592x1944 26@1280x960 26@640x480	1x1 1x1 1x1	0.1-2000 ms
BUC1D-310C	3.1M/Aptina(C) 1/2.5" (5.73x4.3)	2.8x2.8	18.8ke-/lus 73dB 40dB	30@2048x1536 30@1024x768	1x1 1x1	0.1-1000 ms
BUC1D-210C	2.1M/IMX307(C) 1/2.8" (5.73x4.3)	2.9x2.9	1300mV 73dB 43dB	38@1920x1080 38@1024x768	1x1 1x1	0.1-2000 ms


C: Color; M: Monochrome;

Other Specification for BUC1D Camera	
Spectral Range	380-650nm (with IR-cut Filter)

White Balance	Auto/Manual/ROI White Balance/Manual Temp Tint Adjustment/NA for Monochromatic Sensor
Color Technique	Ultra-fine hardware ISP engine /NA for Monochromatic Sensor
Capture/Control SDK	Windows/Linux/macOS/Android Multiple Platform SDK(Native C/C++, C#/VB.NET, Python, Java, DirectShow, Twain, etc)
Recording System	Still Picture and Movie
Cooling System*	Natural
Operating Environment	
Operating Temperature (in Centidegree)	-10~ 50
Storage Temperature (in Centidegree)	-20~ 60
Operating Humidity	30~80%RH
Storage Humidity	10~60%RH
Power Supply	DC 5V over PC USB Port
Software Environment	
Operating System	Microsoft® Windows® XP / Vista / 7 / 8 / 10 (32 & 64 bit) OSx(Mac OS X) Linux
PC Requirements	CPU: Equal to Intel Core2 2.8GHz or Higher
	Memory:2GB or More
	USB Port:USB2.0 High-speed Port
	Display:17" or Larger
	CD-ROM

Dimension of BUC1D

The BUC1D body, made from tough, aluminum alloy, ensures a heavy duty, workhorse solution. The camera is designed with a high quality IR-CUT to protect the camera sensor. No moving parts included. This design ensures a rugged, robust solution with an increased lifespan when compared to other industrial camera solutions.

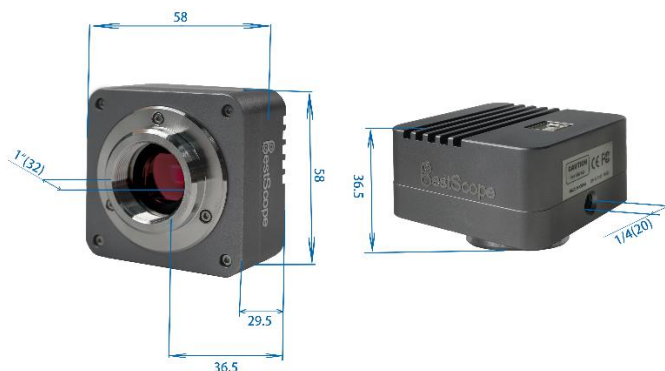

Dimension of BUC1D

Packing Information for BUC1D



Packing Information of BUC1D

Standard Camera Packing List			
A	Carton L:52cm W:32cm H:33cm (20pcs, 12~17Kg/ carton), not shown in the photo		
B	Gift box L:15cm W:15cm H:10cm (0.5~0.55Kg/ box)		
C	BUC1D series USB2.0 C-mount CMOS camera		
D	High-speed USB2.0 A male to B male gold-plated connectors cable /2.0m		
E	CD (Driver & utilities software, Ø12cm)		
Optional Accessory			
F	Adjustable lens adapter	C-mount to Dia.23.2mm eyepiece tube (Please choose 1 of them for your microscope)	108001/AMA037 108002/AMA050 108003/AMA075
		C-mount to Dia.31.75mm eyepiece tube (Please choose 1 of them for your telescope)	108008/ATA037 108009/ATA050 108010/ATA075
G	Fixed lens Adapter	C-mount to Dia.23.2mm eyepiece tube (Please choose 1 of them for your microscope)	108005/FMA037 108006/FMA050 108007/FMA075
		C-mount to Dia.31.75mm eyepiece tube (Please choose 1 of them for your telescope)	108011/FTA037 108012/FTA050 108013/FTA075
Note: For F and G optional items, please specify your camera type(C-mount, microscope camera or telescope camera) , Our engineer will help you to determine the right microscope or telescope camera adapter for your application;			
H	108015(Dia.23.2mm to 30.0mm Ring)/Adapter rings for 30mm eyepiece tube		

I	108016(Dia.23.2mm to 30.5mm Ring)/ Adapter rings for 30.5mm eyepiece tube	
J	108017(Dia.23.2mm to 31.75mm Ring)/ Adapter rings for 31.75mm eyepiece tube	
K	Calibration kit	106011/TS-M1(X=0.01mm/100Div.); 106012/TS-M2(X,Y=0.01mm/100Div.); 106013/TS-M7(X=0.01mm/100Div., 0.10mm/100Div.)

Extension of BUC1D with Microscope or Telescope Adapter

Extension	Picture	
C-mount Camera		Machine vision; Medical imaging; Semiconductor equipment; Test instruments; Document scanners; 2D barcode readers; Web camera and security video; Microscope imaging;
Microscope Camera	  <p>23.2mm Adjustable Adapter</p> <p>23.2mm Fixed Adapter</p>	
Telescope Camera	  <p>31.75mm Adjustable Adapter</p> <p>31.75mm Fixed Adapter</p>	